


Assembly & Care Guide

Tense Wall Lamp

Panter & Tourron

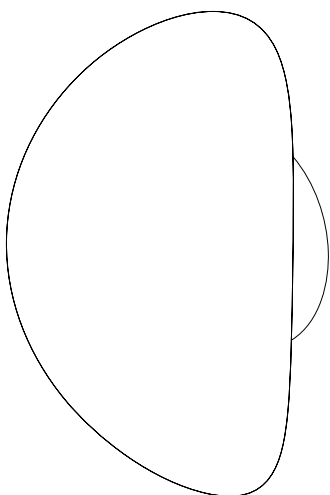

Thank you for choosing the Tense Wall Lamp designed by Panter & Tourron. We hope you will enjoy it as much as we enjoyed making it. Please follow this guide to ensure correct installation, assembly, and care of your New Works product.

Attention

Please read these instructions carefully and retain them for future reference to ensure that the product is used correctly. For your safety, please study each step of this guide first.

New Works will not take any responsibility for accidents or injuries that occurs due to misuse or unintended use of the product. This includes use of the product in unintended environments, use of non-compatible light sources, adapters, other electrical peripherals or any attempts to alter the product.

If you have any questions, please do not hesitate to contact us via email: info@newworks.dk

Safety Precautions

Please read the instructions carefully and retain it for future reference. New Works Aps is not responsible for any faults or damages caused by not following the instructions correctly.

The lamp is only intended for indoor use, consult a professionally qualified electrician if any doubt. Follow the guidance:

Tense Wall Lamp - 220-240V ~ 50/60Hz - Integrated LED

The light bulb and lamp exterior may get hot after prolonged use. Do not try and open the product, any attempt til open the product can result in product failure, of which New Works Aps will not take responsibility.

Keep the product out of children's reach. Dispose of the packaging and do not allow children to play with it. Do not modify the product in any way.

We advise our customers to seek professional assistance when installing the product. New Works Aps will not take responsibility for faulty or wrongful installation.

Cleaning Instructions

Wipe the product with a soft dry or moist cloth. Do not use any abrasive cleaning tools, and never use strong cleaning agents such as household glass cleaner, white spirit, or turpentine.

Light Source: 6W LED, 3000 K
Mains dimmable, trailing edge, no digital transformer needed
Input: 230V/10mA
50/60Hz; Lumen: 400 lm; CRI: 80+
LED life cycle: 50.000 hours

IP20    

Inside the Box

1 x Lamp shade (A)



1 x Lamp base (B)

1x Hex key set /Allen key set /

Unbrako key



Tools Needed

- Screwdriver
- Suitable screws and plugs
- Cord not included

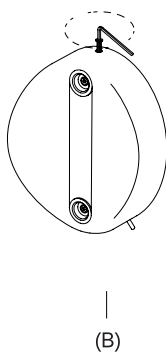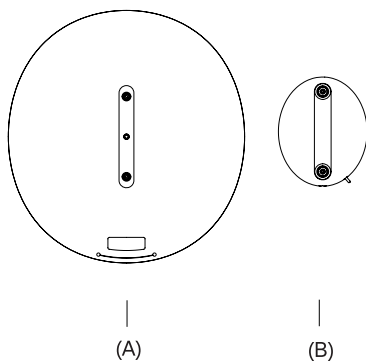

1.



Loosen the screw in top os the wall fitting - Use the hex-key included.

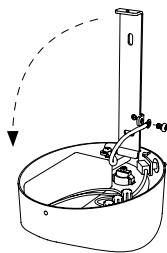

2x screws and plugs

2.

Separate the bracket and canopy. Continue to install the bracket in the desired position, with suitable screws and plugs for the wall type.

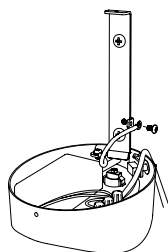


3.

Attach the cord to the terminals inside the canopy. Blue wire is minus (N) and brown wire is live/plus (L). If you are using a grounded cord, attach the grounded wire in the middle hole.

Reattach the canopy to the bracket.

Attention: Always consult a professional if you are not experienced in connecting wires to terminals.

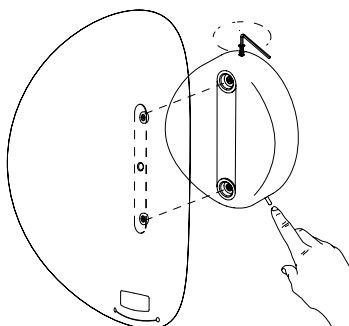

Flip switch to turn on/off

4.

Use the hex key to fasten the canopy to the wall bracket.

Align the magnets on the shade with the magnetic fittings on the canopy. Note that magnet polarity will prevent wrongful assembly.

NEW WORKS.

info@newworks.dk +45 72 30 99 99

Frederiksgade 1, Ground Floor, 1265 Copenhagen, Denmark

www.newworks.dk @newworksdk